



SPECIFICATION CONTROL DRAWING

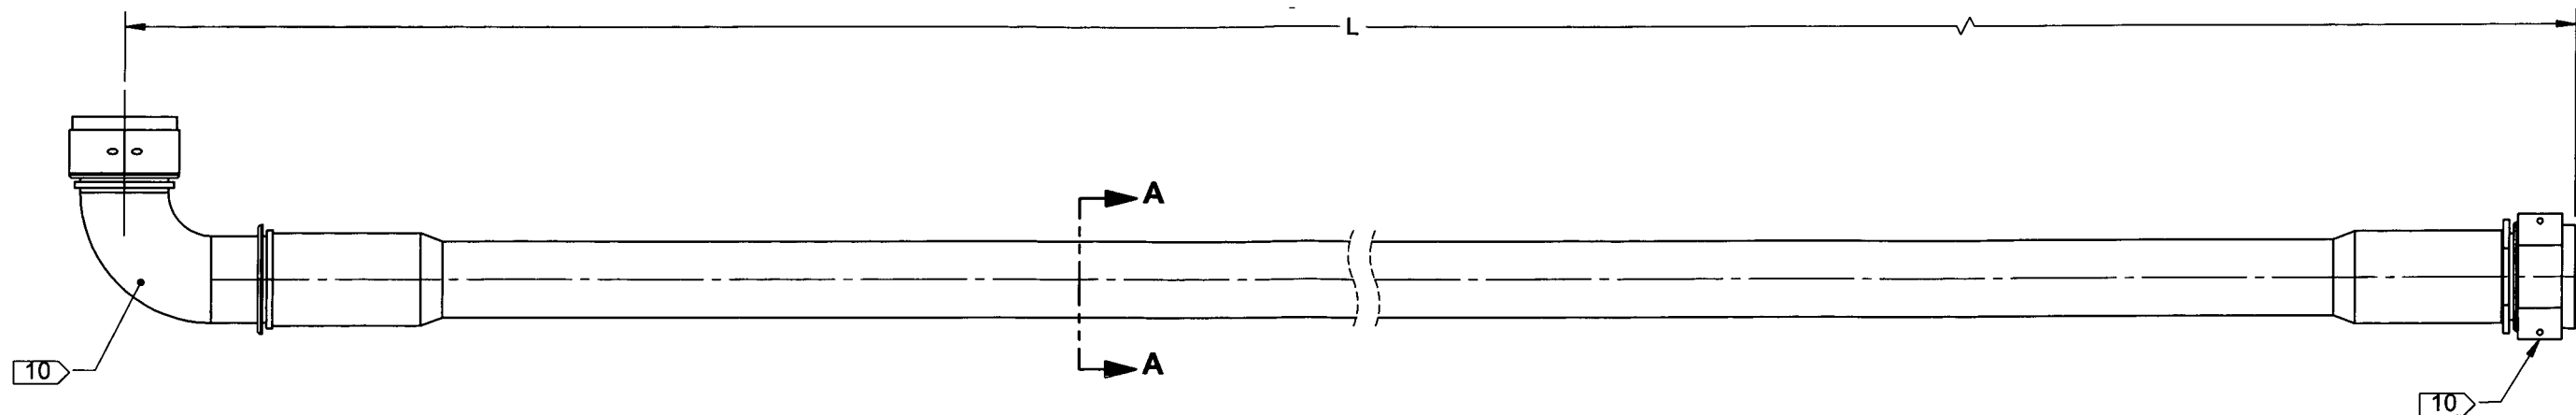

D4943-XX FLEX HOSE

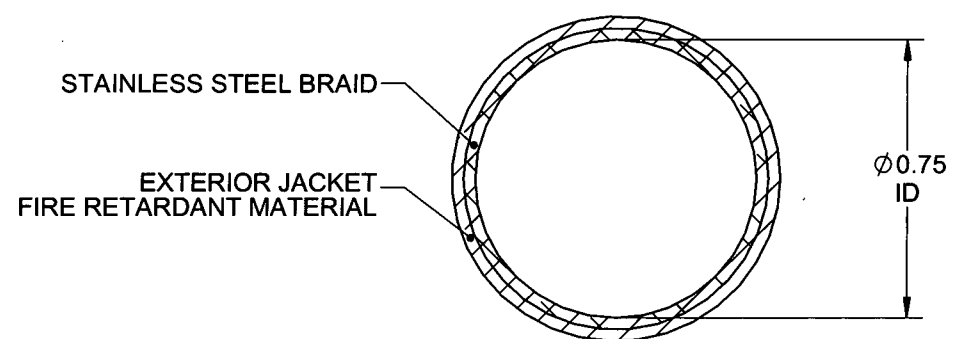

DART P/N	L	VENDOR	VENDOR P/N	WEIGHT
D4943-1	40.00	AERO-FLEX	12EAS12S-03900F OR 12EAS1S2-03900F	1.3 lbs



- NOTES:
- 1) MATERIAL: BRAID: STAINLESS STEEL PER MANUFACTURER
JACKET: FIRE RETARDENT MATERIAL PER MANUFACTURER
END FITTING: STAINLESS STEEL PER MANUFACTURER
 - 2) FINISH: N/A
 - 3) TOLERANCES: N/A
 - 4) UNITS: INCHES UNLESS OTHERWISE NOTED
 - 5) BREAK SHARP EDGES: N/A
 - 6) IDENTIFICATION: PER QSI 044 6.1.
 - 7) WEIGHT: SEE TABLE
 - 8) MAXIMUM OPERATING TEMPERATURE 500 °F
 - 9) MAXIMUM OPERATING PRESSURE 120 PSI
 - 10) END FITTING REQUIREMENTS: FEMALE, 3/4, 37 ° JIC FITTING (THREAD 1-1/16 UN), WITH LOCKWIRE HOLES

UNDER REVIEW
URF 19-639 19.03.14 (SAD)

RELEASED
2014-06-16

C	SEE CHART ADDED ADDITIONAL ACCEPTABLE P/N	AJS	14.05.01
B	SEE CHART: VENDOR WAS SWAGELOK, VENDOR P/N WAS SS-FJ12TA12AS12-40F. REASON: VENDOR CHANGED FOR LEADTIME ISSUES.	AJS	14.03.14
A	NEW ISSUE	AJS	13.09.18
REV.	DESCRIPTION	BY	DATE
DESIGN	AS	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	AJS		
CHECKED	AP	DRAWING NO.	REV. C
MFG. APPR.	JLM	D4943	SHEET 1 OF 1
APPROVED	MP	TITLE	SCALE
DE APPR.	DS	FLEX HOSE	NTS
DATE	14.05.01	COPYRIGHT © 2013 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	

APPROVED